


# SLIDING BEAM ANCHOR

---

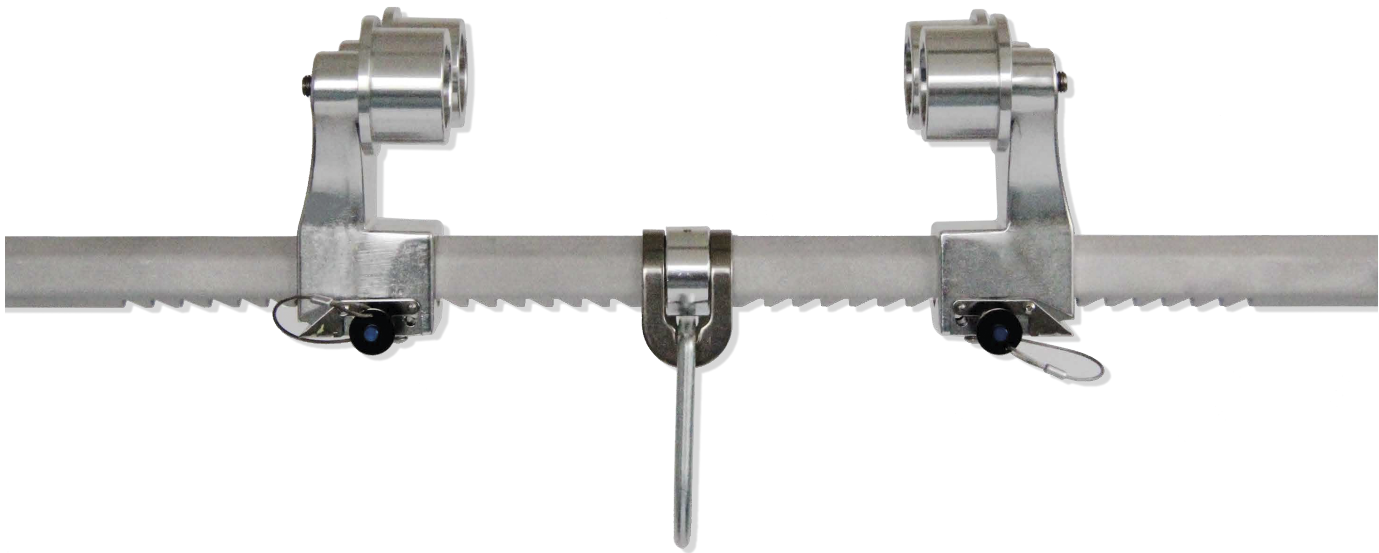

Removable "I" type beam anchor, 2 side adjustable. Made of aluminum & brass and with 1 rotating steel D-ring.  
4 wheels included.

---

# SLIDING BEAM ANCHOR



## Cleaning & maintenance

Products do not require any special maintenance, aside from cleaning. Cleaning of your SDA product is important to prolong its lifetime. Use a damp cloth if necessary.

## Inspection

Look for damage, deterioration or malfunction before and after every use. Inspections should only be made by trained and authorized personnel. Every inspection should be registered in the product dossier.

Type:	Material:	D-rings:	Beam width:	Breaking strength:	Norm:
Fall protection	Aluminum & Brass	1 rotating steel D-ring	Max. 11.8" (300 mm)	Min. 22.3 kN / 5000 lbs	ANSI Z359.18-2017 EN795 Class B

## Product life expectancy

The life expectancy of this product is 5 years from the date of first use recorded on the inspection label, if this date is not recorded, it will be counted from the date of manufacture.

The product is subject to an inspection before each use by the user and at least once a year by a competent person in accordance with current national and international standards. The inspector must be certified by SDA and will determine if the product is suitable for use.